



HIGH PERFORMANCE POOL PUMP

PEGASO PLUS

The PEGASO PLUS pool pump is ultra-quiet and offers optimal performance thanks to the development carried out by our engineers and its high-quality components.

Robust design for maximum power and efficiency demands. For any type of residential pool, whether seawater, saline chlorination or chlorine, working even at temperatures of 55°C.

MAIN FEATURES

- Durability and Robustness.
- AISI 316L stainless steel shaft.
- Anti-vibration bearings.
- Viton seals for excellent chemical resistance.
- Silicon carbide mechanical seal.
- Noryl turbine with fiberglass.
- Stainless steel ring at inlet and outlet

✓ Energy savings and efficiency.

For maximum performance at a low cost, we have models with energy efficiency class IE3.




✓ Robust and transparent lid for quick inspection.





✓ Reinforced support bench for stability.

✓ Standard dimensions for the main pumps on the market.

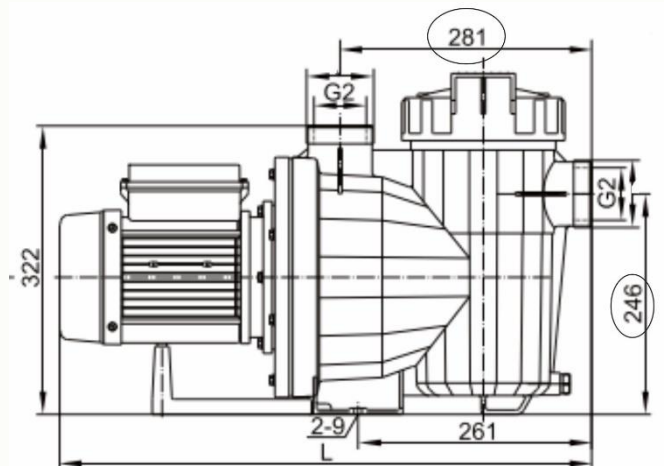

CURVES	CODE	POWER HP	VOLTAGE 50Hz or 60Hz	INTENSITY A	CONNECTION mm	L mm	WEIGHT kg	PACKING LxWxH mm
1	NDE-PP075M	0,75	220-240	3,2	63 mm	576	14,6	615x300x440
1	NDE-PP075T	0,75	230/400	$\Delta 1,7/Y1,0$	63 mm	576	14,6	615x300x440
2	NDE-PP100M	1,00	220-240	3,8	63 mm	576	15,5	615x300x440
2	NDE-PP100T	1,00	230/400	$\Delta 2,4/Y1,4$	63 mm	576	15,5	615x300x440
3	NDE-PP150M	1,50	220-240	5,2	63 mm	576	16,5	615x300x440
3	NDE-PP150T (IE3)	1,50	230/400	$\Delta 3,6/Y2,1$	63 mm	576	16,5	615x300x440
4	NDE-PP200M	2,00	220-240	7,0	63 mm	595	18,8	635x300x440
4	NDE-PP200T (IE3)	2,00	230/400	$\Delta 4,5/Y2,6$	63 mm	595	18,8	635x300x440
5	NDE-PP250M	2,50	220-240	8,6	63 mm	595	20,5	635x300x440
5	NDE-PP250T (IE3)	2,50	230/400		63 mm	595	20,5	635x300x440
6	NDE-PP300M	3,00	220-240	10	63 mm	595	22,0	635x300x440
6	NDE-PP300T (IE3)	3,00	230/400	$\Delta 7,1/Y4,1$	63 mm	595	22,0	635x300x440
7	NDE-PP400M	4,00	220-240	14	63 mm	636	25,3	635x300x440
7	NDE-PP400T (IE3)	4,00	230/400		63 mm	636	25,3	675x300x440

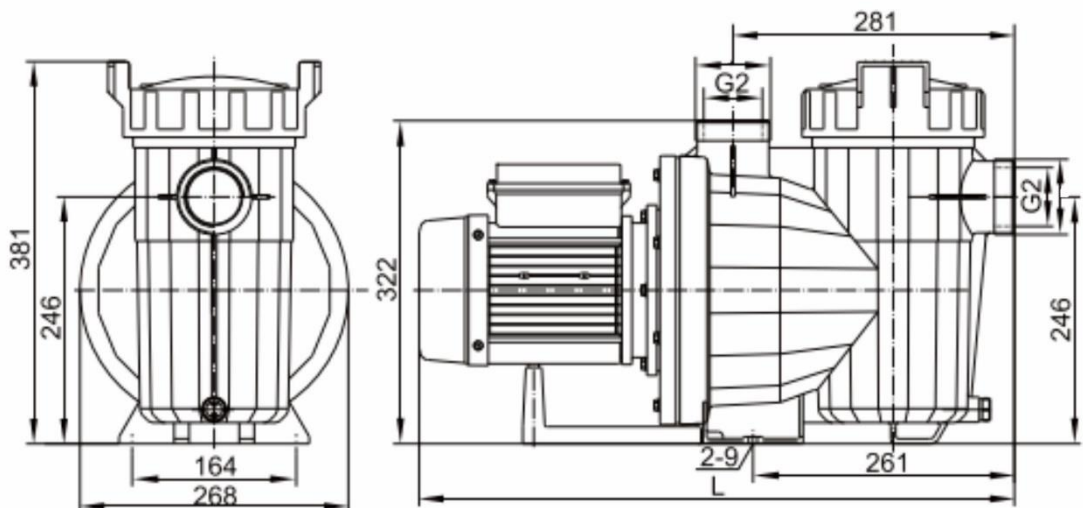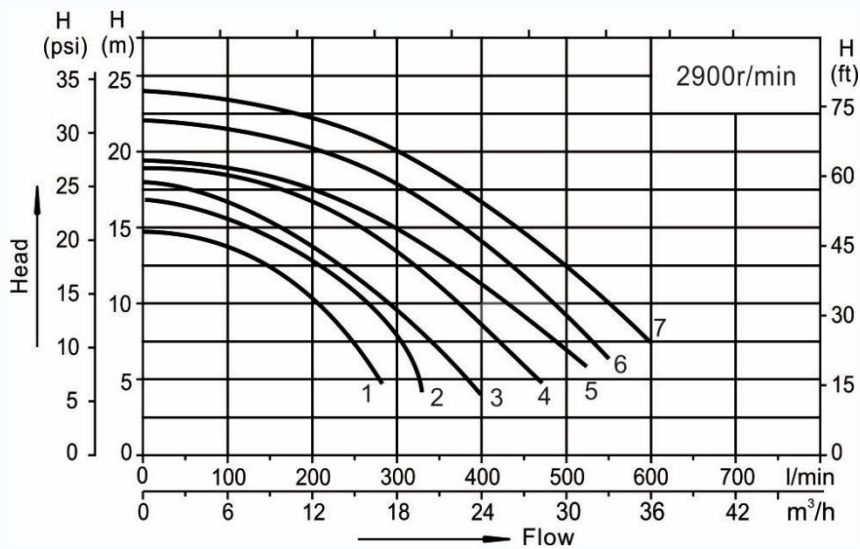

© NDE Group. The products in this leaflet are for illustrative purposes only. Specifications may vary NDE Group reserves the right to modify its products without prior notice.