

FILTROS FILTERS

COMBO FMCO Bobinado

Conexiones no incluidas
Connections not included

- Conjunto compacto formado por bomba+filtro bobinado. Diseñado para un fácil transporte y almacenaje.
- Perfecto para piscinas elevadas o de pequeñas dimensiones.
- Rápida instalación. Base incluida.
- Presión de trabajo máxima de 2,5 bar. Presión de prueba máxima 3,75 bar. Temperatura máxima de trabajo 40°C.
- Bomba con conexión 1,5" (50mm), clase IP55&F
- Disponibilidad de personalizar la combinación del filtro con la bomba.
- Alimentador de tabletas de cloro disponible.
- **Con válvula multipuerto de 6 vías incluida.**
- **Garantía tanque filtro 5 años.**




- *Set of modular bobbin wound+filter syste. Designed for easy storage and transportation.*
- *It is a perfect solution for temporary swimming pools.*
- *Quick installation. Base included.*
- *Maxim operating pressure 2,5 bar. Maxim test pressure 3,75 bar. Maxim operating temperature 40°C.*
- *Pump with 1,5" (50mm) connection, class IP55&F.*
- *Customization of filter and pump models pairing is available.*
- *Optional chlorine feeder.*
- ***With 6-way multiport valve included.***
- ***Filter tank warranty 5 years.***

Code	Pool Size (m ³) at 6h turnover	Filter (mm)	Multiport Valve (inches)	Filtration Area (m ²)	Max Flow rate (m ³ /h)	Silica Sand (kg)	Pump (HP)	Power
FMCO350	29	350	1,5"	0.1	5.00	16	0.50	220-240 50/60Hz 1phase 2850rpm
FMCO400	38	400	1,5"	0.13	6.30	30	0.50	
FMCO450	48	450	1,5"	0.16	8.00	40	0.75	
FMCO550	69	550	1,5"	0.24	11.52	85	1.00	
FMCO650	97	650	1,5"	0.33	16.20	155	1.20	

FILTROS FILTERS

COMBO FMCO Dimensiones

Disponemos conexiones milimétricas (mm)/
pulgadas (NPT). Voltaje 60Hz
We have milimetric (mm)/inches (NPT). Voltage 60Hz

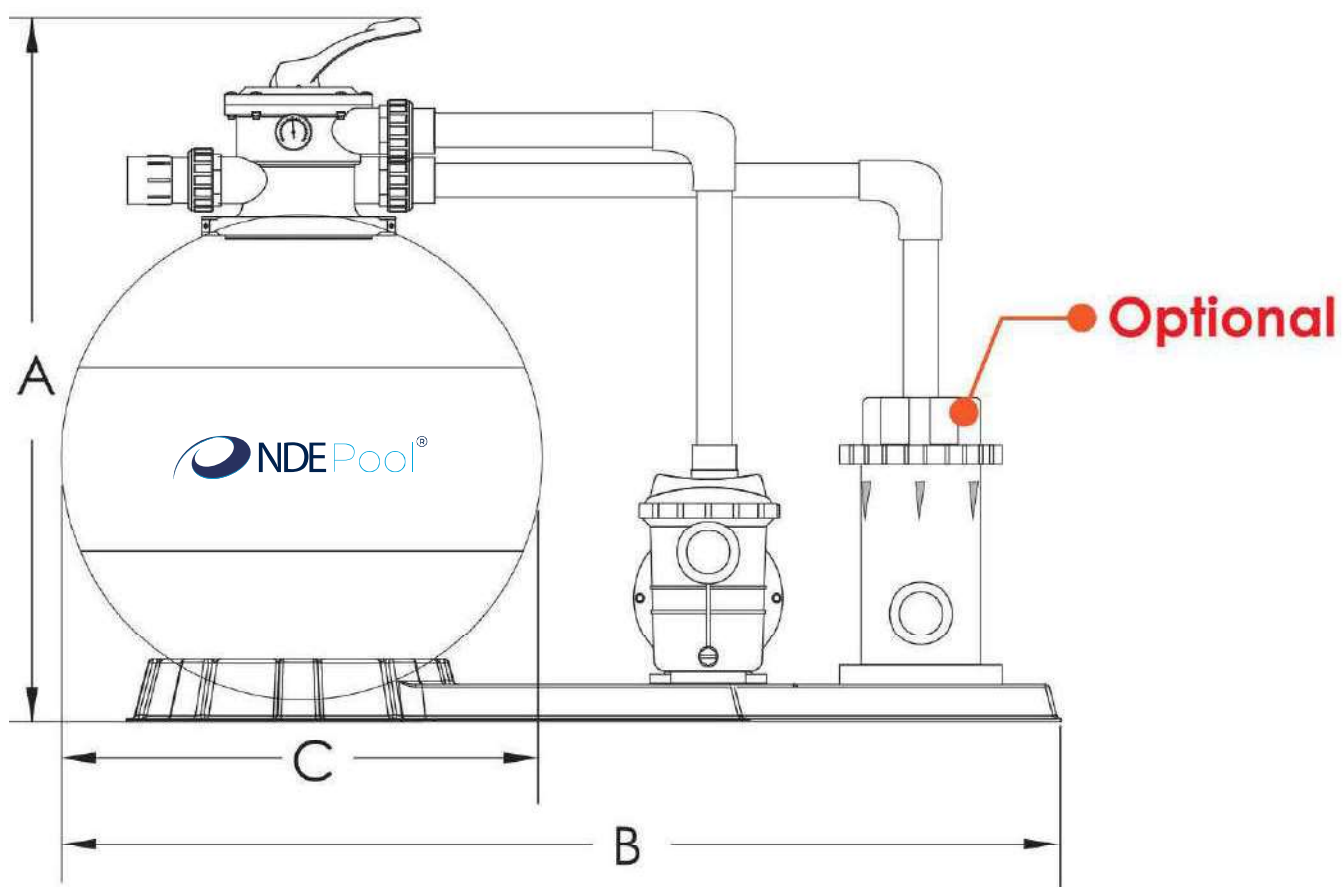

Opcional: Dosificador de cloro en tabletas
Optional: Chlorine tablet feeder

MODEL	A (mm)	B (mm)	C (mm)
FMCO350	660	650	350
FMCO400	740	750	400
FMCO450	800	750	450
FMCO550	840	850	550
FMCO650	960	850	650